

## D-Series Desktop Appliances



**OGT-DC100, OGT-DE200**

The D-Series Desktop Appliances are versatile test systems designed to support all popular storage interfaces and protocols, such as PCIe, SAS, SATA, and FC. These appliances are perfect for environments inside or outside the lab, where the appliances rest on a bench or a desk, rather than being contained in a rack.

These desktop appliances can be connected to a variety of external enclosures that provide high-density scaling and power management. For an easy way to test mixed-protocol devices,


the expandable desktop appliance can be equipped with an optional OakGate 4-bay U.2 plug-in module, which allows testing of up to four SSDs that use a U.2 (SFF-8639) connector.

All desktop appliances are powered by the OakGate Enduro controller application and Storage Validation Framework Pro (SVF Pro) engine, the industry's most advanced storage testing software. This robust software, now in its fourth generation, offers a comprehensive set of testing features and capabilities.

Compact Desktop Appliance (OGT-DC100)	Expandable Desktop Appliance (OGT-DE200)
	
<p>Provides a compact solution for testing environments where space is limited or high-port densities are not a priority. It includes one backplane PCIe Gen3 slots for testing an add-in card (AIC).</p> <p>Its small footprint and quiet operation makes the compact desktop appliance ideal for individual developers working in a small office, cubicle, or lab environment.</p> <p>This appliance delivers the same full set of advanced functionality as all other OakGate appliances.</p>	<p>Provides maximum expansion possibilities in a desktop form factor. It includes four backplane PCIe Gen3 slots for testing AICs or connecting to a variety of external enclosures. With an optional 4-bay U.2 plug-in module (pictured), it can test four U.2 multi-protocol SSDs with integrated power management.</p> <p>The OGT-DE200 is the second generation of the expandable desktop appliance, which includes airflow improvements and an adjustable fan speed knob for quieter operation over its predecessor (the OGT-DE100).</p>
<p><b>Specifications</b></p> <ul style="list-style-type: none"> <li>• Dimensions of chassis: 8.66" W × 11.81" D × 5.08" H</li> <li>• Intel® Xeon® eight-core processor, 2.10 GHz</li> <li>• 16GB DDR4 ECC system memory</li> <li>• One PCIe Gen3 x16 expansion slot</li> <li>• Powered by Enduro / SVF Pro</li> <li>• One-year hardware/software support</li> </ul>	<p><b>Specifications</b></p> <ul style="list-style-type: none"> <li>• Dimensions of chassis: 17.3" W × 20.47" D × 7.01" H (4U)</li> <li>• Intel Xeon single-socket, hex-core processor, 3.50 GHz</li> <li>• 32GB DDR4 ECC system memory</li> <li>• Four PCIe Gen3 expansion slots: <ul style="list-style-type: none"> <li>◦ One x16 slot</li> <li>◦ Three x8 slots, each using a x16 connector</li> </ul> </li> <li>• Adjustable fan speed knob, which can be used to reduce fan noise when the appliance is not fully loaded</li> <li>• Support for the optional 4-bay U.2 plug-in module (OGT-MU401, OGT-MU402, or OGT-MU403)</li> <li>• Powered by Enduro / SVF Pro</li> <li>• One-year hardware/software support</li> </ul>

## APPLIANCE CONFIGURATION EXAMPLE

The following figure shows the client, with the OakGate Enduro controller application and SVF Pro, directing the second generation expandable desktop appliance (OGT-DE200). In this example, the OGT-DE200 is equipped with a 4-bay multi-protocol U.2 plug-in module (OGT-MU403) for testing up to four multi-protocol (NVMe/SAS/SATA) SSDs that use a U.2 (SFF-8639) connector. Depending on the configuration of the 4-bay module, up to three add-in cards (AIC) DUTs can be tested in the backplane of the DE200.

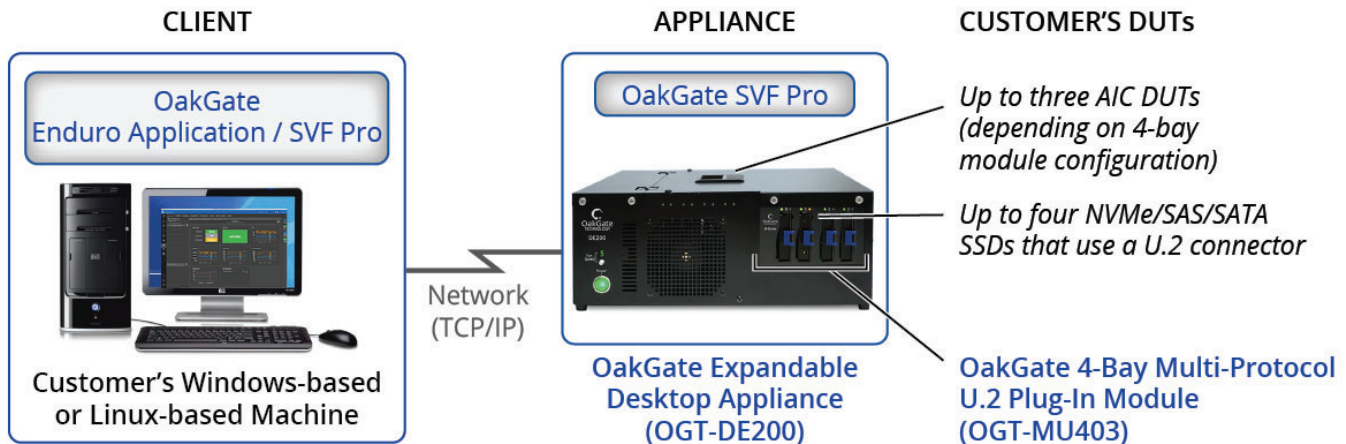

## ORDERING INFORMATION

PRODUCT DESCRIPTION	MODEL NUMBER
<b>D-SERIES APPLIANCES</b>	
Compact Desktop Appliance	OGT-DC100
Expandable Desktop Appliance	OGT-DE200
<b>COMPATIBLE M-SERIES MODULES (for OGT-DE200 Only)</b>	
4-Bay Single-Port NVMe U.2 Plug-In Module	OGT-MU401
4-Bay Dual-Port NVMe U.2 Plug-In Module	OGT-MU402
4-Bay Multi-protocol U.2 Plug-In Module	OGT-MU403
<b>COMPATIBLE A-SERIES ADD-ONS</b>	
3/6G SAS/SATA Host Bus Adapter with Eight Ports	OGT-AH100
12G SAS/6G SATA Host Bus Adapter with Eight Ports	OGT-AH101
NVMe x16 Host Card (OGT-DE200 only)	OGT-AH106
PCIe Power Interposer Card for OakGate Appliances and 7-Slot PCIe Enclosure	OGT-AP100
<b>COMPATIBLE E-SERIES ENCLOSURES (for OGT-DE200 Only)</b>	
12-Bay Single-Port NVMe U.2 Enclosure	OGT-EU12P-01
12-Bay SAS/SATA U.2 Enclosure	OGT-EU12S-12
12-Bay Multi-Protocol, Single-Port NVMe U.2 Enclosure	OGT-EU12M-01
<b>COMPATIBLE E-SERIES ENCLOSURES for PCIe EDGE CARDS</b>	
7-Slot PCIe Gen3 Expansion Enclosure without (or with) Integrated Power Management	OGT-EP700 (or OGT-EP701)

Copyright © August 23, 2019 OakGate Technology. All rights reserved worldwide. Although this information is believed to be accurate and reliable at the time of publication, OakGate Technology assumes no responsibility for errors or omissions. OakGate Technology reserves the right to make changes or corrections without notice. This document is the property of OakGate Technology and may not be duplicated without permission from OakGate Technology.